

Weights

Operating weight	4900 kg
Operating weight with canopy	4819 kg
Additional weight for cab with HVAC	19 kg
Additional weight for steel tracks	125 kg
Ground pressure with rubber tracks	35.41 kPa

Engine

Make / model	Bobcat 1.8L, 97/68 EC Stage V Turbocharged
Fuel	Diesel
Number of cylinders	3
Displacement	1.79 L
Maximum NET power (ISO 9249)	31.3 kW
Maximum NET torque (ISO 9249)	155.0 Nm

Hydraulic System

Pump type	Single outlet variable displacement piston pump with gear pumps
Piston pump capacity	99.00 L/min
Auxiliary relief	210.0 bar
Boom port relief base and rod end	290.0 - 290.0 bar
Auxiliary (AUX1) flow	78.20 L/min
Auxiliary (AUX2) flow	46.60 L/min

Performance

Digging force, dipperstick (ISO 6015)	22171 N
Digging force, bucket (ISO 6015)	37744 N
Travel speed, low range	2.8 km/h
Travel speed, high range	5.5 km/h

Slew System

Boom swing, left	75.0°
Boom swing, right	50.0°
Slew rate	8.7 RPM

Fluid Capacities

Cooling system	7.60 L
Engine lubrication plus oil filter	6.30 L
Fuel reservoir	72.00 L
Hydraulic reservoir	15.10 L

Environmental


Noise level LpA(EU Directive 2006/42/EC)	75 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	95 dB(A)
Whole body vibration (ISO 2631-1)	0.14 ms ⁻²
Hand-arm vibration (ISO 5349-1)	0.37 ms ⁻²

Standard Features

1960 mm dozer blade	Horn
350 mm rubber track	Hydraulic joystick controls
5 inch display	Proportional fingertip auxiliary and boom swing offset
Auto idle	Retractable seat belt
Adjustable double acting auxiliary hydraulic (AUX1) with QC on ARM	Selectable auxiliary hydraulic flow
Battery disconnect switch	Suspension seat with high back
Blade float feature	Storage compartment
Clamp ready	Tool box
Control console locks	TOPS/ROPS/FOPS cab * 1
Cupholders	Two-speed travel with Auto shift
Dual Direction Detent	Upper structure tie down
Engine/hydraulic monitor with shutdown	LED Work lights
Foldable and ergonomic pedals	Warranty: 24 months, 2000 hours (whichever occurs first)
Full fuel warning alarm	



1. Roll Over Protective Structure (ROPS) – Meets requirements of ISO 3471. Tip Over Protective Structure (TOPS) – Meets requirements of ISO 12117. Falling Object Protective Structure (FOPS) - Meets requirements of ISO 3449.

Working Range

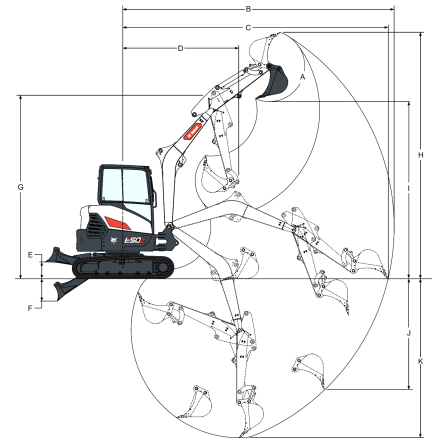

(A)	186.0°	(F)	502.0 mm
(B)	6056.0 mm	(H)	5499.0 mm
(C)	5922.0 mm	(I)	4015.0 mm
(D)	2593.0 mm	(J)	2462.0 mm
(E)	370.0 mm	(K)	3553.0 mm

Dimensions

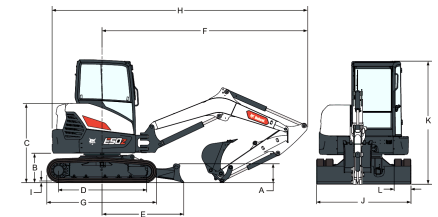

(A)	373.0 mm	(J)	1959.0 mm
(B)	608.0 mm	(K)	2546.0 mm
(C)	1640.0 mm	(L)	350.0 mm
(D)	1803.0 mm	(M)	527.0 mm
(E)	1692.0 mm	(N)	872.0 mm
(F)	4250.0 mm	(O)	2075.0 mm
(G)	2276.0 mm	(P)	1035.0 mm
(H)	5395.0 mm	(Q)	2016.0 mm
(I)	25.0 mm	(R)	2006.0 mm

Options

Air conditioning	Machine IQ (telematic)
2nd Auxiliary hydraulics	Steel tracks
Dlx textile suspension seat	Beacon kit
Boom safety valve with overload warning	Left and right mirror
Boom & arm safety valves with overload warning	Additional work light kit
AM/FM stereo radio	Rubber bolt-on pads for steel tracks
FOGS kit (Overhead guard)	Special applications kit
Lifting chain kit	Hydraulic coupler lines
Travel motion alarm	